LISA

Plug-in



Standard features


- Self-contained compressor with R290 gas, plug in for use
- Ventilated cooling system
- Inner Led light under top
- Dixell thermostat
- Double glazed tempered glass
- Auto self-evaporation drip tray
- Base: stainless steel

KOLDBLUE

Specifications:

Models	LISA 66R	LISA 90R	LISA 120R
Exterior Dimensions	660*530*730	900*530*730	1200*530*730
TDA	0.72 m²	0.9 m²	1.1 m²
Temperature	-1 - +5 °C		
Net Volume	85 L	120 L	160 L
Compressor	Donper		
Cooling System	Ventilated		
Refrigerant	R290		
Voltage/Frequency	220-240V, 50/60Hz, 1PH		
Input Power (50Hz)	330 W	340 W	350 W
Input Power (60Hz)	340 W	350 W	360 W
Energy Consump.	4.4 kWh/24h	4.6 kWh/24h	5.1 kWh/24h
EEI	C	C	C
Thermostat	Dixell		
Evaporator	Copper pipe + aluminum fin type		
Condenser	Steel wire tube		
Body Material	Exterior: Stainless Steel 201 Interior: Stainless Steel 304 & Tempered Glass		

Section Drawing:

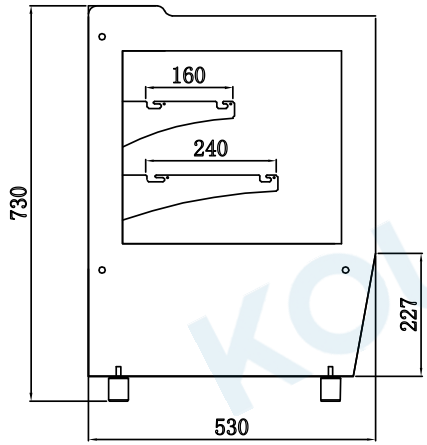


KOLDBLUE

Specifications:

Models	LISA 66C	LISA 90C	LISA 120C
Exterior Dimensions	660*530*730	900*530*730	1200*530*730
TDA	0.7 m²	0.8 m²	0.9 m²
Temperature	-1 - +5 °C		
Net Volume	85 L	120 L	160 L
Compressor	Donper		
Cooling System	Ventilated		
Refrigerant	R290		
Voltage/Frequency	220-240V, 50/60Hz, 1PH		
Input Power (50Hz)	330 W	340 W	350 W
Input Power (60Hz)	340 W	350 W	360 W
Energy Consump.	4.2 kWh/24h	4.4 kWh/24h	4.8 kWh/24h
EEI	C	C	C
Thermostat	Dixell		
Evaporator	Copper pipe + aluminum fin type		
Condenser	Steel wire tube		
Body Material	Exterior: Stainless Steel 201 Interior: Stainless Steel 304 & Tempered Glass		

Section Drawing:

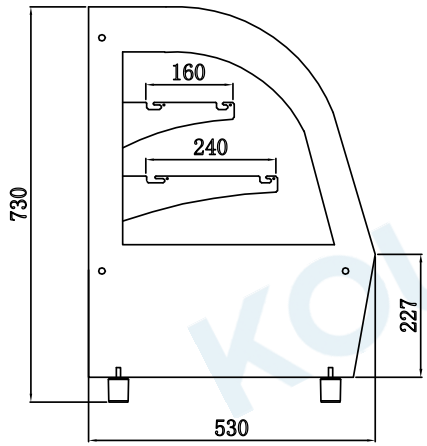

KOLDBLUG