# VERA

Plug-in





## Standard features


- Self-contained compressor with R290 gas, plug in for use
- Ventilated cooling system
- Led light under each shelf and top
- Dixell thermostat
- Double glazed anti-fog front glass
- With auto self-evaporation drip tray
- Base: stainless steel or powder coated galvanized steel

KOLDBLUE

## Specifications:

| Models | VERA 60DS | VERA 90DS | VERA 120DS | VERA 150DS | VERA 180DS | VERA 210DS |
|---|---|---|---|---|---|---|
| Exterior Dimensions | 600*700*1200 | 900*700*1200 | 1200*700*1200 | 1500*700*1200 | 1800*700*1200 | 2100*700*1200 |
| TDA | 1.06 m² | 1.39 m² | 1.74 m² | 2.08 m² | 2.42 m² | 2.76 m² |
| Temperature | -1 - +5 °C | | | | | |
| Net Volume | 120 L | 200 L | 275 L | 350 L | 425 L | 500 L |
| Compressor | Secop | | | | | |
| Cooling System | Ventilated | | | | | |
| Refrigerant | R290 | | | | | |
| Voltage/Frequency | 220-240V, 50/60Hz, 1PH | | | | | |
| Input Power (50Hz) | 530 W | 600 W | 670 W | 780 W | 1000 W | 1100 W |
| Input Power (60Hz) | 560 W | 640 W | 720 W | 820 W | 1050 W | 1150 W |
| Energy Consump. | 8.1 kWh/24h | 9.6 kWh/24h | 11.4 kWh/24h | 13.1 kWh/24h | 14.9 kWh/24h | 17.2 kWh/24h |
| EEI | D | D | D | D | D | D |
| Thermostat | Dixell | | | | | |
| Con. Fan Motor | SAIWEI EC | | | | | |
| Evap. Fan Motor | SAIWEI EC | | | | | |
| Evaporator | Copper pipe + aluminum fin type | | | | | |
| Condenser | Steel wire tube | | | | | |
| Body Material | Exterior: Stainless Steel 201 / Powder Coated Galvanized Steel Interior: Stainless Steel 304 & Tempered Glass | | | | | |

## Section Drawing:

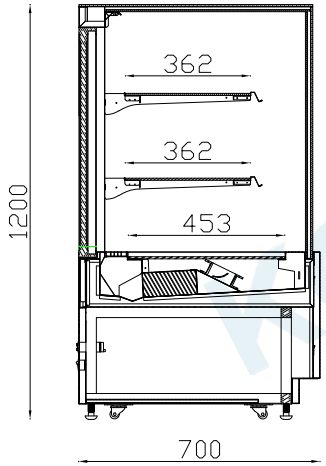



KOLDBLUE

## Specifications:

| Models | VERA 60TS | VERA 90TS | VERA 120TS | VERA 150TS | VERA 180TS | VERA 210TS |
|---|---|---|---|---|---|---|
| Exterior Dimensions | 600*700*1400 | 900*700*1400 | 1200*700*1400 | 1500*700*1400 | 1800*700*1400 | 2100*700*1400 |
| TDA | 1.26 m² | 1.67 m² | 2.07 m² | 2.47 m² | 2.87 m² | 3.28 m² |
| Temperature | -1 - +5 °C | | | | | |
| Net Volume | 150 L | 240 L | 330 L | 420 L | 510 L | 600 L |
| Compressor | Secop | | | | | |
| Cooling System | Ventilated | | | | | |
| Refrigerant | R290 | | | | | |
| Voltage/Frequency | 220-240V, 50/60Hz, 1PH | | | | | |
| Input Power (50Hz) | 540 W | 610 W | 685 W | 800 W | 1020 W | 1130 W |
| Input Power (60Hz) | 570 W | 650 W | 735 W | 840 W | 1070 W | 1180 W |
| Energy Consump. | 10.2 kWh/24h | 11.9 kWh/24h | 13.9 kWh/24h | 16.3 kWh/24h | 18.2 kWh/24h | 20.2 kWh/24h |
| EEI | D | D | D | D | D | D |
| Thermostat | Dixell | | | | | |
| Con. Fan Motor | SAIWEI EC | | | | | |
| Evap. Fan Motor | SAIWEI EC | | | | | |
| Evaporator | Copper pipe + aluminum fin type | | | | | |
| Condenser | Steel wire tube | | | | | |
| Body Material | Exterior: Stainless Steel 201 / Powder Coated Galvanized Steel Interior: Stainless Steel 304 & Tempered Glass | | | | | |

## Section Drawing:

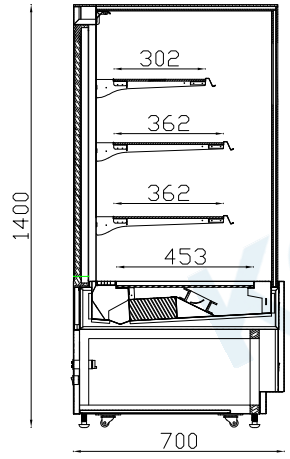


KOLDBLUE