KBGDM

Plug-in



Standard features


- Self-contained Embraco Inverter compressor with R290 gas, plug in for use
- 5 layers adjustable wire shelving, with price tag
- Inner vertical LED lights
- SAlWEI EC evaporator and condenser fan motor
- Dixell digital thermostat
- Frameless double glazed Low-E glass door for chiller
- Frameless triple glazed anti-fog glass door for freezer
- With auto self-evaporation drip tray
- Stainless steel inner base
- Custom color

KOLDBLUE

Specifications:

Models	KBGDM-27R	KBGDM-54R	KBGDM-81R
Exterior Dimensions	680*830*2100	1250*830*2100	1875*830*2100
TDA	0.84 m²	1.74 m²	2.64 m²
Temperature	-1 - +5 °C		
Net Volume	547 L	1209 L	1869 L
Compressor	Embraco Inverter		
Cooling System	Ventilated		
Refrigerant	R290		
Voltage/Frequency	220-240V, 50/60Hz, 1PH / 115V, 60Hz, 1PH		
Input Power (220-240V)	350 W	530 W	750 W
Input Power (115V)	540 W	550 W	805 W
Energy Consump.	3.93 kWh/24h	5.53 kWh/24h	7.52 kWh/24h
EEI	B	B	B
Thermostat	Dixell		
Con. Fan Motor	SAIWEI EC		
Evap. Fan Motor	SAIWEI EC		
Evaporator	Copper pipe + aluminum fin type		
Condenser	Steel wire tube		
Body Material	Exterior: Powder Coated Galvanized Steel Interior: Powder Coated Aluminum		

Section Drawing:

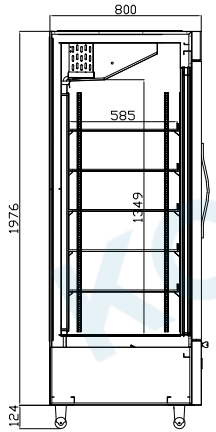


KOLDBLUE

Specifications:

Models	KBGDM-27F	KBGDM-54F	KBGDM-81F
Exterior Dimensions	680*830*2100	1250*830*2100	1875*830*2100
TDA	0.84 m²	1.74 m²	2.64 m²
Temperature	-16 - -22 °C		
Net Volume	547 L	1209 L	1869 L
Compressor	Embraco Inverter		
Cooling System	Ventilated		
Refrigerant	R290		
Voltage/Frequency	220-240V, 50/60Hz, 1PH / 115V, 60Hz, 1PH		
Input Power (220-240V)	500 W	930 W	1300 W
Input Power (115V)	570 W	1108 W	1300 W
Energy Consump.	7.71 kWh/24h	13.82 kWh/24h	19.93 kWh/24h
EEI	C	C	C
Thermostat	Dixell		
Con. Fan Motor	SAIWEI EC		
Evap. Fan Motor	SAIWEI EC		
Evaporator	Copper pipe + aluminum fin type		
Condenser	Steel wire tube		
Body Material	Exterior: Powder Coated Galvanized Steel Interior: Powder Coated Aluminum		

Section Drawing:

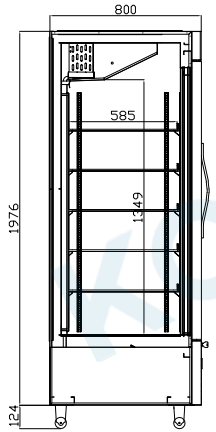

KOLDBLUE